

Made in  
Europe



10-year  
product guarantee



12-year guarantee for  
90 % rated power



25-year guarantee for  
80 % rated power



**ECO LINE**

**60/250 – 270 W**

Monocrystalline module family



Longlife tested



Power proofed



Safety provided



Selection of  
components



Cross-linking  
degree test



Performance surplus  
of 1.5 to 6.49 Wp



Imp  
sorting



Special packing to  
avoid micro cracks  
in the cells



German  
warrantor

The 60-cell module is the large-size all-rounder among the Luxor modules. Eco in this case means especially economical: The high wattage makes the module the ideal solution for industrial scale equipments. From the open-field facilities, through the tracking system, to the roof-mounted installation. High-quality solar cell with an efficiency up to 19.57% at the best possible low light behaviour ensure the best energy output. And this at plus tolerances of 1.5 to 6.49 Wp. Exemplary

in the manufacturing quality, too: An especially durable plug-in connection guarantees the best power contact under all conditions, and the hollow-section frame made of anodised aluminium and compatible with every assembly system, is torsionally stiff and corrosion-free. Manufactured according to German standards and under the strict eyes of our engineers, each Luxor photovoltaic module is marked by a special level of durability and reliability.


# ECO LINE ECO LINE 60/250 – 270 W



Monocrystalline module family


Electrical data	LX-250M	LX-255M	LX-260M	LX-265M	LX-270M
Rated power P <sub>mpp</sub> [Wp]	250.00	255.00	260.00	265.00	270.00
P <sub>mpp</sub> range from	251.50	256.50	261.50	266.50	271.50
P <sub>mpp</sub> range to	256.49	261.49	266.49	271.49	276.49
Rated current I <sub>mpp</sub> [A]	8.17	8.28	8.38	8.49	8.60
Rated voltage V <sub>mpp</sub> [V]	30.79	30.98	31.21	31.39	31.57
Short-circuit current I <sub>sc</sub> [A]	8.61	8.72	8.85	8.95	9.04
Open-circuit voltage U <sub>oc</sub> [V]	37.41	37.52	37.67	37.81	37.98
Efficiency at STC	15.46%	15.77%	16.08%	16.38%	16.69%
Efficiency at 200 W/m <sup>2</sup>	14.91%	15.23%	15.55%	15.83%	16.21%
NOCT [°C]	47 ± 2°C	47 ± 2°C	47 ± 2°C	47 ± 2°C	47 ± 2°C

Back view/ Front view/ Side view<sup>2</sup>

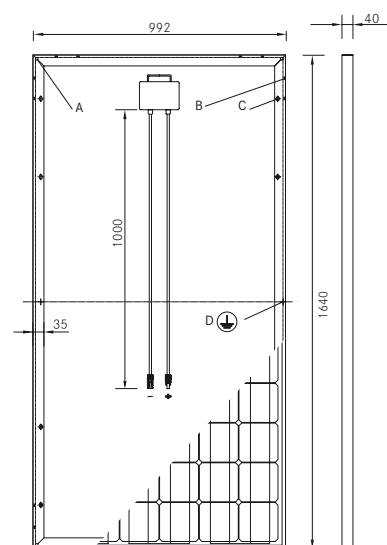


- A: 4 x drainage 10\*10 mm
- B: 8 x ventilation aperture 3\*7 mm
- C: 8 x mounting hole<sup>3</sup> d = 7 mm
- D: 2 x earthing d = 2 mm

## Characteristics

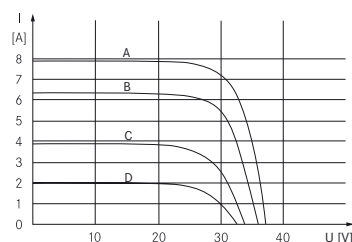

A: 1000 W/m<sup>2</sup> | B: 800 W/m<sup>2</sup> | C: 600 W/m<sup>2</sup> | D: 200 W/m<sup>2</sup>

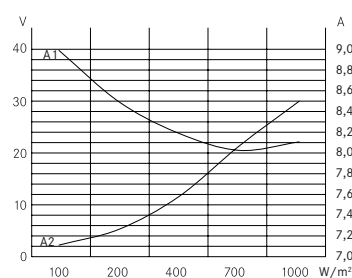

A1: Impp | A2: Vmpp

Limiting values	LX-250M / LX-255M / LX-260M / LX-265M / LX-270M
Max. system voltage [V]	1000 V
Max. return current [I]	15 A
Temperature range	-40 to 85°C
Snow-load zone <sup>1</sup>	approval up to SLZ 3 (according to DIN 1055)
Max. pressure load (static)	5400 Pa

Temperature coefficient	LX-250M / LX-255M / LX-260M / LX-265M / LX-270M
Temperature coefficient [V]   [I]   [P]	-0.34% /°C   0.05% /°C   -0.45% /°C

Specifications	LX-250M / LX-255M / LX-260M / LX-265M / LX-270M
Number of cells (matrix)	6 x 10, three strings in a row
Cell size	156 mm x 156 mm (diagonal: 200 mm)
Module dimensions (L x W x H) <sup>2</sup>   Weight	1,640 mm x 992 mm x 40 mm   18.3 kg
Front-side glass	3.2 mm hardened solar glass with low iron content
Frame	stable, anodised aluminium frame in a hollow-section design
Socket	plastic (PPO), IP65, ventilated and strain-relieved
Diodes	3 Schottky Diodes 15A/45V
Cable	4 mm <sup>2</sup> solar cable, cable length 1.0 m
Plug-in connection	high-quality plug-in system, (IP65) MC4 or equivalent
Hail test (max. hailstorm)	Ø 45 mm   impact velocity 23 m/s
Salt mist corrosion test	classified according to IEC 61701:2011 ed.2
General technical approval	classified according to DIN EN 13501-5 as B <sub>ROOF</sub> (ti)

Packing	LX-250M / LX-255M / LX-260M / LX-265M / LX-270M
Packing unit	25 modules, 2 Impp classes   28 PU/40' container
Dimensions (L x W x H)   Weight	174 cm x 114 cm x 121 cm   500 kg gross

The specifications and average values can vary slightly. Decisive is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance: rated power +/- 3%, other values +/- 10%, all information in this data sheet corresponds to DIN 50380, other information to be found in the installation guidelines.

<sup>1</sup> For standing installation

<sup>2</sup> Tolerance L/W = +/- 3 mm, H = the dimensions given in the order confirmation will be decisive

<sup>3</sup> Location on request

Luxor, your specialised company

Guidelines: 2006/95/EG-2006/95/EC, 89/336/EEG-89/336/EEC, 93/68/EEG-93/68/EEC



+ Factory Inspection through  
TUV Rheinland | Reg. No.: AK 60083014  
+ CEC California (US)  
+ CEC Australien | Reg.-Nr.:  
33012/60039977-3/60039978-3

Printed on Recystar Polar, recycling  
paper with FSC certificate and the  
"Blue Angel" eco-label.



ClimatePartner  
**klimaneutral  
gedruckt**

Zertifikatsnummer:  
778-53212-0511-1068  
www.climatepartner.com